


ECO 200

MULTI CHAMBER

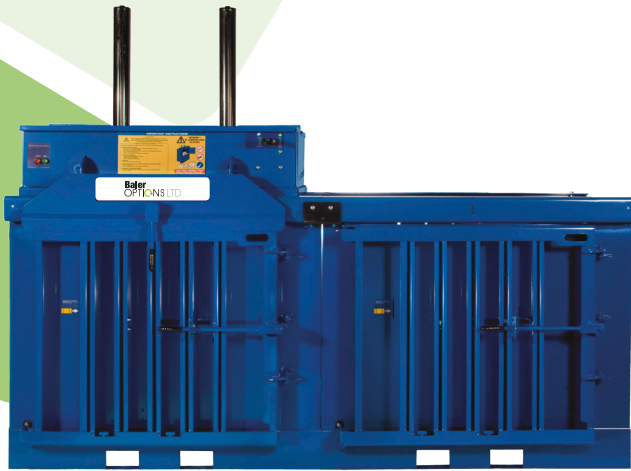

BALER FEATURES

- Saves handling time with multiple chambers: free to load while other chamber compacts
- Multiple chambers offer an efficient way of separating different materials before baling
- Roller guided head for ease of movement
- Retaining claws to prevent spring back
- Top loading machine
- Suitable for areas with height restrictions
- Fully automated bale ejector : simplifies removal of bale

OPTIONAL EXTRAS

- Additional chambers may be added (up to 6)
- Available with 110 volts power supply
- PLC panel with auto-return press plate

BALER SPECIFICATIONS

| | |
|-----------------------|-------------------------|
| Height (mm) | 2469 |
| Width (mm) | 3260 |
| Depth (mm) | 1269 |
| Weight (kg) | 1400 |
| Power Supply (V/Hz) | 220-240V (single-phase) |
| Motor (kW) | 2.2 kW 16 Amp |
| Pressing Force (ton) | (up to) 16 |
| Transport Height (mm) | 2469 |
| Noise Level (dB) | 74 |

DIAGRAM OF HEIGHT (&EXTRA CHAMBER)



BALE DIMENSIONS

| | |
|-------------------|--|
| Height (mm) | 1000 |
| Width (mm) | 1000 |
| Depth (mm) | 800 |
| Weight (kg) | (up to) 200 (depending on material used) |
| Cycle Time (secs) | 34 |

LOADING APERTURE SIZE

| | |
|------------|------|
| Width (mm) | 1074 |
| Depth (mm) | 800 |

